



**higher education
& training**

Department:
Higher Education and Training
REPUBLIC OF SOUTH AFRICA

NASIENRIGLYN


NATIONALE SERTIFIKAAT STERKTE- EN STRUKTUURLEER N5

14 AUGUSTUS 2019

Hierdie nasienriglyn bestaan uit 7 bladsye.

VRAAG 1

1.1

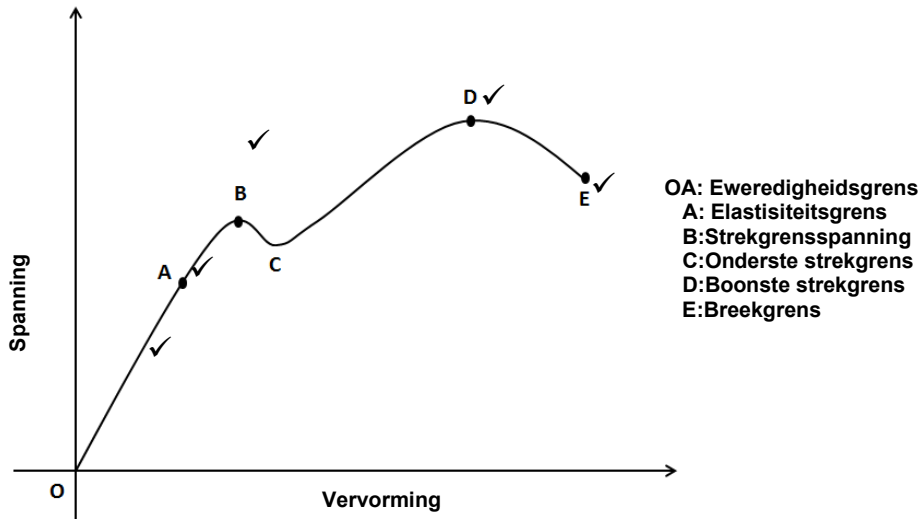

FIGUUR 1

(5)

1.2 1.2.1

$$\sigma_{LOP} = \frac{F_{LOP}}{A_O} = \frac{32000}{1,327 \times 10^{-4}} = 241,145 MPa$$

1.2.2

$$X_{LOP} = \sigma_{LOP} \cdot \left(\frac{L}{E}\right)$$

$$0,22 \times 10^{-3} = 241,145 \times 10^6 \cdot \left(\frac{0,07}{E}\right)$$

$$\therefore E = 76,728 GPa$$

1.2.3

$$\sigma_{UTS} = \frac{F_{max}}{A_O} = \frac{70000}{1,327 \times 10^{-4}} = 527,506 MPa$$

1.2.4

$$\sigma_F = \frac{F_F}{A_F} = \frac{52000}{8,577 \times 10^{-5}} = 606,077 MPa$$

1.2.5

$$\% \Delta X = \left(\frac{X}{L}\right) \cdot 100 = \left(\frac{8,33}{13}\right) \cdot 100 = 64,077\%$$

(5 × 2) (10)
[15]

VRAAG 2

2.1 2.1.1

$$F_t = F_s$$

$$\sigma_t \cdot (p - d) \cdot t = \frac{\pi}{4} \cdot d^2 \cdot \tau \cdot n \cdot x \checkmark$$

$$115 \times 10^6 \cdot (p - 0,02) \cdot 0,014 = \left(\frac{\pi}{4}\right) \cdot (0,02^2) \cdot (75 \times 10^6) \cdot (2) \cdot (1,75) \checkmark$$

$$\therefore p = 71,222 \approx 71 \text{ mm} \quad (4)$$

2.1.2 Neem plaatspanning in aanmerking:

$$\eta_t = \left(\frac{p - d}{p}\right) \cdot 100 = \left(\frac{71 - 20}{71}\right) \cdot 100 = 71,83\% \checkmark$$

Neem skuifkrag in aanmerking:

$$\eta_s = \frac{\frac{\pi}{4} \cdot d^2 \cdot \tau \cdot n \cdot x \checkmark}{\sigma_t \cdot t \cdot p} = \frac{\frac{\pi}{4} \cdot (0,02^2) \cdot (75 \times 10^6) \cdot (2) \cdot (1,75) \checkmark}{115 \times 10^6 \cdot (0,071) \cdot (0,014)} = 72,14\% \checkmark$$

Neem breking in aanmerking:

$$\eta_c = \frac{\sigma_c \cdot d \cdot t \cdot n \checkmark}{\sigma_t \cdot t \cdot p} = \frac{190 \times 10^6 \cdot (0,02) \cdot (0,014) \cdot (2) \checkmark}{115 \times 10^6 \cdot (0,014) \cdot (0,071)} = 93,08\% \checkmark$$

Veilige voegrendement = 71,83% \checkmark (10)
[14]

VRAAG 3

3.1 Neem die toegepaste eksterne las in aanmerking: $F_t = 240 \text{ kN}$

$$X_1 = X_2 \cdot \frac{F_1 \cdot L_1}{A_1 \cdot E_1} = \frac{F_2 \cdot L_2}{A_2 \cdot E_2} \checkmark$$

$$F_1 = \frac{2,827 \times 10^{-3} \cdot (180 \times 10^9)}{2,262 \times 10^{-3} \cdot (90 \times 10^9)} \cdot F_2 \checkmark$$

$$= 2,5 \cdot F_2 \xrightarrow{eq1} \checkmark$$

$$F_t = F_1 + F_2$$

$$240000 = 2,5 \cdot F_2 + F_2 \checkmark$$

$$\therefore F_2 = 68571,429 \text{ N} \checkmark$$

$$\therefore F_1 = 171428,571 \text{ N} \checkmark$$

$$\sigma_2 = \frac{F_2}{A_2} = \frac{68571,429}{2,262 \times 10^{-3}} = 30,315 \text{ MPa(tensile)} \checkmark$$

Neem temperatuurverandering in aanmerking: $T_1 = 27^\circ\text{C}$

$$F_1 = F_2 : \sigma_1 \cdot A_1 = \sigma_2 \cdot A_2 \checkmark$$

$$\sigma_1 \cdot (2,827 \times 10^{-3}) = 30,315 \times 10^6 \cdot (2,262 \times 10^{-3}) \checkmark$$

$$\therefore \sigma_1 = 24,256 \text{ MPa(tensile)} \checkmark$$

$$\Delta t \cdot (\alpha_1 - \alpha_2) = \frac{\sigma_1}{E_1} + \frac{\sigma_2}{E_2} \checkmark$$

$$\Delta t \cdot (21 \times 10^{-6} - 16 \times 10^{-6}) = \frac{24,256 \times 10^6}{180 \times 10^9} + \frac{30,315 \times 10^6}{90 \times 10^9} \checkmark$$


$$\therefore \Delta t = 94,318 \text{ }^\circ\text{C} \checkmark$$

$$t_2 = 27 - 94,318 = -67,318 \text{ }^\circ\text{C} \checkmark$$

[19]

VRAAG 4


Konfigurasiediagram

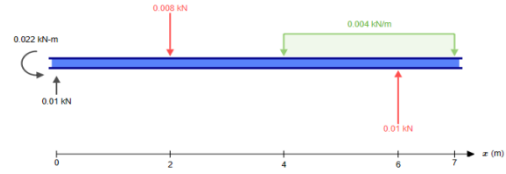

FIGUUR 1

4.1

Skuifkrag-
diagram ✓

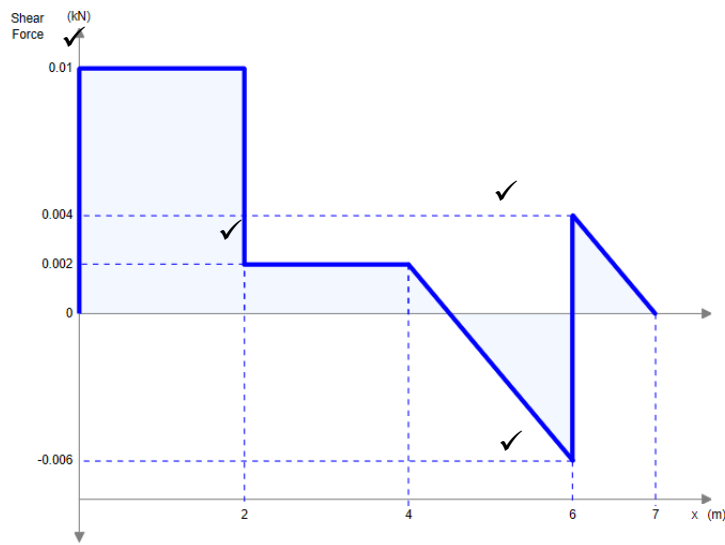


FIGUUR 2

(5)

4.2

Buig-
moment-
diagram ✓

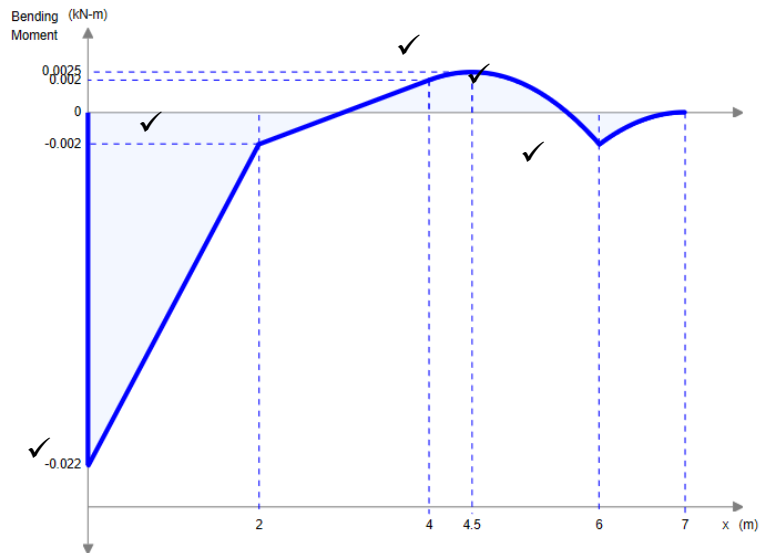

FIGUUR 3

(6)

$$\begin{aligned}
 4.3 \quad \tan \theta &= \tan \theta \quad \checkmark \\
 \frac{2}{x} &= \frac{5}{2-x} \quad \checkmark \\
 2 \cdot (2-x) &= 5 \cdot (x) \\
 4 - 2 \cdot x &= 5 \cdot x \\
 x &= 0,571 \text{ m} \quad \checkmark \\
 \therefore 4,571 \text{ m} &(\rightarrow) \text{ vanaf vaste steun} \quad \checkmark
 \end{aligned}
 \tag{4}$$

[15]

VRAAG 5

$$\begin{aligned}
 5.1 \quad \bar{y}_T &= \frac{\bar{y}_1 \cdot A_1 + \bar{y}_2 \cdot A_2}{A_1 + A_2} = \frac{734,3 \cdot (1,23 \times 10^{-3}) + 341,75 \cdot (17,84 \times 10^{-3})}{1,23 \times 10^{-3} + 17,84 \times 10^{-3}} = 367,069 \text{ mm} \uparrow \quad \checkmark \\
 \bar{x}_T &= \frac{\bar{x}_1 \cdot A_1 + \bar{x}_2 \cdot A_2}{A_1 + A_2} = \frac{221,95 \cdot (1,23 \times 10^{-3}) + 126,85 \cdot (17,84 \times 10^{-3})}{1,23 \times 10^{-3} + 17,84 \times 10^{-3}} = 132,984 \text{ mm} \rightarrow \quad \checkmark
 \end{aligned}
 \tag{4}$$

$$\begin{aligned}
 5.2 \quad I_{XX_T} &= [I_{x_1} + A_1 \cdot r_{y_1}] + [I_{x_2} + A_2 \cdot r_{y_2}] \quad \checkmark \\
 &= [2,176 \times 10^{-6} + 1,23 \times 10^{-3} \cdot (0,367^2)] + [1363 \times 10^{-6} + 17,84 \times 10^{-3} \cdot (0,025^2)] \quad \checkmark \\
 &= 1,681 \times 10^{-4} + 1,374 \times 10^{-3} \\
 &= 1,543 \times 10^{-3} \text{ m}^4 \quad \checkmark
 \end{aligned}
 \tag{6}$$

$$\begin{aligned}
 5.3 \quad I_{YY_T} &= [I_{y_1} + A_1 \cdot r_{x_1}] + [I_{y_2} + A_2 \cdot r_{x_2}] \\
 &= [0,2528 \times 10^{-6} + 1,23 \times 10^{-3} \cdot (0,089^2)] + [51,83 \times 10^{-6} + 17,84 \times 10^{-3} \cdot (0,00613^2)] \quad \checkmark \\
 &= 9,988 \times 10^{-6} + 5,25 \times 10^{-5} \\
 &= 6,249 \times 10^{-5} \text{ m}^4 \quad \checkmark
 \end{aligned}
 \tag{6}$$

$$\begin{aligned}
 5.4 \quad Z_{\max} &= \frac{I_{XX_T}}{y_{\max}} = \frac{1,543 \times 10^{-3}}{(0,684 + 0,102 - 0,367)} = 3,691 \times 10^{-3} \text{ m}^3 \quad \checkmark \\
 Z_{\min} &= \frac{I_{XX_T}}{y_{\min}} = \frac{1,543 \times 10^{-3}}{(0,367)} = 4,204 \times 10^{-3} \text{ m}^3 \quad \checkmark
 \end{aligned}
 \tag{6}$$

5.5

$$\sigma_{\max} = \frac{M \cdot y_{\max}}{I_{XX_T}}$$

$$145 \times 10^6 = \frac{M \cdot (0,684 + 0,102 - 0,367)}{1,543 \times 10^{-3}}$$

$$\therefore M = 535211,504 \text{ N.m}$$

$$\omega = (9,65 + 140) \times 9,81 = 1468,067 \text{ N/m}$$

$$M = \frac{1}{4} \cdot W \cdot L + \frac{1}{8} \cdot \omega \cdot L^2$$

$$535211,504 = \frac{1}{4} \cdot (W) \cdot (7) + \frac{1}{8} \cdot (1468,067) \cdot (7^2)$$

$$\therefore W = 300,697 \text{ N}$$

(7)
[29]


VRAAG 6

6.1 Neem momente om LHS :

$$R_D \cdot (10) = 80 \cdot (7) + 120 \cdot (4)$$

$$\therefore R_D = 104 \text{ N}$$

$$\therefore R_A = 96 \text{ N}$$

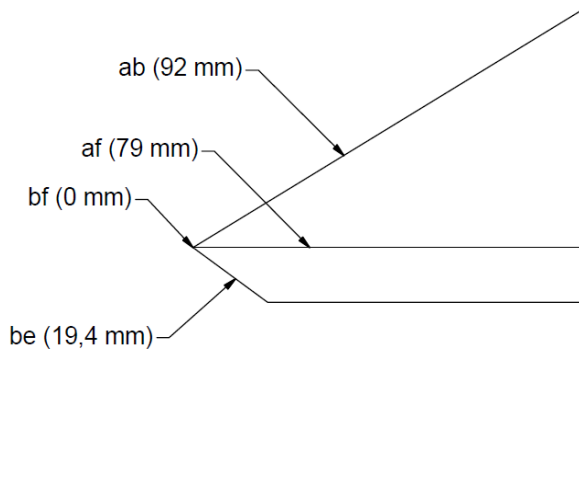

Vektor	Grootte	Aard
ab	184 N	S
af	158 N	T
bf	0 N	-
be	39 N	S

'n Toleransie van ±2 N kan gebruik word.

Skaal 1 mm = 2 N

[8]

TOTAAL: 100